

Bituthene® GP

Self-adhesive rubber bitumen/HDPE waterproof membrane for low risk applications

Description

Bituthene® GP is a combination of a high density polyethylene film and a self-adhesive rubber/bitumen compound. It is supplied in rolls 1 mm thick overall, 1 m wide and 25 m long (25 m²).

Installation

The product is for low-risk applications only and is capable of resisting a hydrostatic head up to 1 m. All concrete and masonry surfaces to which the membrane is to be applied must have a smooth finish. Surfaces should be clean, dry free of voids and any sharp protrusions. Masonry surfaces must be rendered to provide an even flush surface, if not rendered then all brick or blockwork must be flush pointed. For higher risk applications, we would recommend the use of Bituthene® 4000, Bituthene® 8000 or Preprufe® 800PA.

Minimum ambient application temperature +5 °C. Ensure that all surfaces are clean, dry and free from ice/frost. Surfaces should be smooth, free from voids and protrusions, and any imperfections should be made good using Betec® NSM mortar.

All surfaces except those below ground bearing slabs should be primed with one coat of Primer B1 applied by brush or roller. Bituthene GP shall be laid by peeling back the protective release paper and applying the adhesive face onto the prepared surface.

Bituthene® LM to be applied at necessary internal and external corners, penetrations etc. prior to applying the overall membrane.

Bituthene GP should be brushed onto the surface to ensure good initial bond and exclude air. Adjacent rolls are overlapped 50 mm

minimum at side and ends and well rolled with a firm pressure, using a lap roller to ensure complete adhesion and continuity between the layers.

On high walls it may be necessary to batten fix the membrane to prevent slippage.

For application over damp and green concrete, we would recommend to use Bituthene 4000 or Bituthene 8000 system using damp/green concrete tolerant primer.

Repairs, Protection & Drainage


- Damaged areas to be repaired with an oversize patch applied to a clean dry surface extending 100 mm beyond damage and firmly rolled.
- Protect Bituthene membranes immediately after application to avoid damage from other trades, construction materials or backfill, using only Protection O3 boards.
- If the area around the substructure can be drained to a low level outlet then GCP recommends the Hydroduct range of drainage membranes.

Health and Safety

There is no legal requirement for a Safety Data Sheet for Bituthene® GP, Protection O3 board, Hydroduct® or waterstops. For Primer B1, Bituthene® LM and Pak Adhesive™ read the product carton and Safety Data Sheet (SDS) before use. Users must comply with all risk and safety phrases. SDS's can be obtained from GCP Applied Technologies or from our web site at gcpat.com.

Advantages

- **Waterproof** – capable of resisting a hydrostatic head when fully supported (up to 1 metre of water)
- **Cold applied** – safe, no flame, no heating, no torch-on equipment, self-adhesive overlap ensure continuity
- **Flexible** – accommodates minor settlement and shrinkage movement
- **Reduces installation risk** – no risk of:
 - **Over heating** – that damages the membrane and affects performance
 - **Under heating** – poor membrane adhesion and lap sealing affects water tightness
- **Rubber/bitumen** – flexibility and resistance to most dilute acids and alkalis
- **Lighter roll** – for ease of application
- **Longer roll** – for less storage

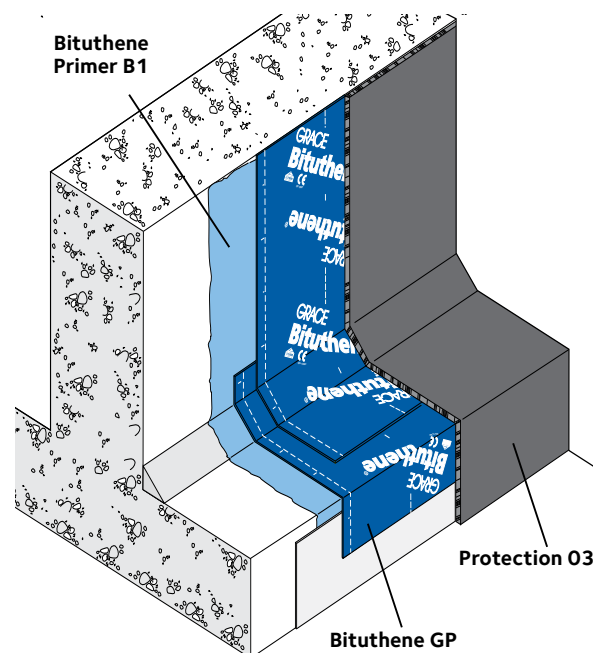

Details shown are typical illustrations only and not working drawings. For assistance with working drawings and additional technical advice please contact GCP Technical Services.


Supply

Bituthene GP	1 m x 25 m roll (25 sq m) Weight 30 kg
Storage	Store upright in dry conditions below +30°C
Primer B1	5 & 25 litre drums
Coverage	7-10 sq m per litre application, (depending on surface porosity and ambient temperature)
Ancillary Products	
Bituthene LM	5.7 litre packs
Protection O3 board	3 mm x 0.9 m x 2.03 m (± 6%)

Equipment by Others: Soft brush, stanley knife; brush or roller for priming. Stiff broom and airline for cleaning surface.

Physical Properties

Property	Typical Value	Test Method
Tear Resistance	Long 91.6 N Trans 89.6 N	MOAT 27:5.4.1
Peel Strength	105.4 N	MOAT 27:5.1.3
Tensile Strength of joints	130.6 N	MOAT 27:5.2.2
Moisture Vapour Permeability	0.39 g/m ² /24 hours	BS 3177: 1959 (75% RH/25°C)
Resistance to hydrostatic head	< 1m of water	ASTM D5385

 0836	GCP Applied Technologies (UK) Limited Ipswich Road, Slough, Berkshire SL1 4EQ United Kingdom 06 09/F017
	EN 13967 Bituthene® GP Flexible Sheets for Waterproofing, Type T Reaction to fire: E Watertightness: Pass at 60 kPa

Declared values according to EN 13967

Property	Declared Value	Test Method
Visible defects - MDV	None	EN 1850-2
Straightness - MDV	Pass	EN 1848-2
Length (m) - MDV	25.15 ± 0.15	EN 1848-2
Thickness (mm) - MDV	1.12 ± 0.08	EN 1849-2
Width Carrier Sheet (m) - MDV	0.987 ± 0.007	EN 1848-2
Width Overall (roll) (m) - MDV	1.000 ± 0.010	EN 1848-2
Mass per unit area (g/m²) - MDV	1050 ± 90	EN 1849-2
Water tightness to liquid water (at 60 kPa)	Pass	EN 1928
Resistance to impact (Al-board (mm) - MLV)	≥ 100	EN 12691
Resistance to tearing (Nail Shank) - unreinforced sheets (N) - MLV	≥ 100	EN 12310-1
Joint strength (N/50mm) - MLV	≥ 130	EN 12317-2
Water vapour transmission (μ= sD/d) - MDV	120.000 ± 30%	EN 1931 Method B

Declared values according to EN 13967

Property	Declared Value	Test Method
Durability of water tightness against ageing/ degradation (at 60 kPa)	Pass	EN 1296 EN 1928 Method B
Durability of water tightness against chemicals (at 60 kPa)	Pass	EN 1847 Method B EN 1928 Method B
Compatibility with bitumen	Pass	EN 1548
Resistance to static loading	≥ 10 - Pass	EN 12730
Tensile properties - unreinforced sheets (N/50mm) - MLV	Long ¹ ≥ 200 Trans ² ≥ 240	EN 12311-2 Method A
Tensile properties - unreinforced sheets (Elongation %) - MLV	Long ¹ ≥ 270 Trans ² ≥ 220	EN 12311-2 Method A
Reaction to fire (Class; test conditions)	E	EN 13501-1

Footnotes: 1. Longitudinal - related to the roll direction 2. Transversal - related to the roll direction 3. MDV: Manufacturer Declared Value 4. MLV: Manufactured Limiting Value All declared values shown in this data sheet are based on test results determined under laboratory conditions and with the product sample taken directly from stock in its original packing without any alteration or modification of its component parts.

gcpat.com | Customer Service: Tel +44 (0)1753 490000 | Fax +44 (0)1753 490001

We hope the information here will be helpful. It is based on data and knowledge considered to be true and accurate, and is offered for consideration, investigation and verification by the user, but we do not warrant the results to be obtained. Please read all statements, recommendations, and suggestions in conjunction with our conditions of sale, which apply to all goods supplied by us. No statement, recommendation, or suggestion is intended for any use that would infringe any patent, copyright, or other third party right.

Bituthene, BETEC, Bitustik and Preprufe are trademarks, which may be registered in the United States and/or other countries, of GCP Applied Technologies Inc. This trademark list has been compiled using available published information as of the publication date and may not accurately reflect current trademark ownership or status.

© Copyright 2017 GCP Applied Technologies Inc. All rights reserved.

GCP Applied Technologies Inc., 62 Whittemore Avenue, Cambridge, MA 02140 USA

In the UK, Ipswich Road, Slough, Berkshire, SL1 4EQ, UK

GCP0082_0617 Bituthene GP_UK



gcp applied technologies